



TAPER PIPE REAMERS NPFT (DRYSEAL) OR NPT

HIGH SPEED STEEL STRAIGHT SHANK

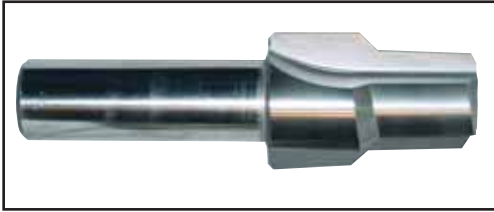

Pipe Tap Cutters will form in one pass a taper reamed and chamfered hole that mates with a tapered pipe thread tap. (For use in pre-drilled tubing or precast holes.) Substantially reduces premature tap wear and breakage. Cutter is completely form relieved for ease of sharpening.

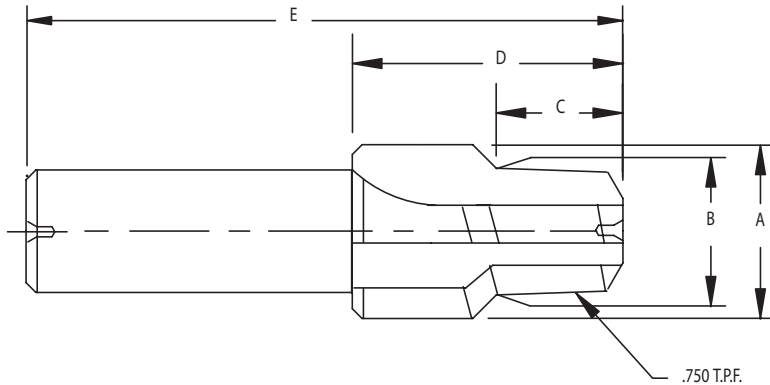

COATINGS AVAILABLE

TITANIUM NITRIDE-TIN
TITANIUM CARBONITRIDE-TICN
TITANIUM ALUMINUM NITRIDE-TIALN
AL TITANIUM NITRIDE-ALTiN

COOLANT THRU AVAILABLE

TOOL NUMBER	THREAD SIZE	A DIA.	B DIA.	C REAMER LENGTH	D HEAD LENGTH	E OAL	SHANK DIMENSIONS		NO. OF FLUTES
							DIAMETER	LENGTH	
PR-00H	1-16-27	5/8	.254	15/32	1-1/4	3-1/2	.750	2-1/4	3
PR-01H	1/8-27	5/8	.347	15/32	1-1/4	3-1/2	.750	2-1/4	3
PR-02H	1/4-18	3/4	.450	21/32	1-3/8	3-5/8	.750	2-1/4	3
PR-03H	3/8-18	7/8	.586	11/16	1-1/2	3-3/4	.750	2-1/4	3
PR-04H	1/2-14	1	.725	7/8	1-7/8	4-1/8	.750	2-1/4	3
PR-05H	3/4-14	1-1/4	.937	7/8	1-7/8	4-1/8	.750	2-1/4	3
PR-06H	1-11-1/2	1-1/2	1.173	1-1/16	2-1/8	4-5/8	1.000	2-1/2	3
PR-07H	1-1/4-11-1/2	1-7/8	1.518	1-1/8	2-1/4	4-3/4	1.000	2-1/2	3
PR-08H	1-1/2-11-1/2	2-1/8	1.757	1-1/8	2-1/2	5	1.000	2-1/2	4
PR-09H	2-11-1/2	2-5/8	2.230	1-7/32	2-3/4	5-1/4	1.000	2-1/2	4
PR-10H	2-1/2-8	3-1/8	2.670	1-3/4	3-1/8	5-5/8	1.000	2-1/2	4
PR-11H	3-8	3-1/4	3.296	1-7/8	3-1/2	7	1.000	2-1/2	4

